

USING THE AD-FIX

Before applying to the window ensure the glass surface is clean and dry. Avoid using any oil based cleaning products such as washing up liquid, which can leave residue on the glass having a negative impact on the suction and may damage the suction pads. Next, swivel each of the suction pads to make sure that the small release tab is accessible from the outside edges of the holder. This will make it much easier to remove the sign holder. Apply the sign holder assembly to the glass and *press firmly* on the centre of each of the suction pads to create suction. Bring the security wire in and shut the window.

When removing the Adfix, release the suction on each of the release tabs by using the spatula provided on the end of the wire.

Caution! When doing this, make sure to keep hold of the security wire in case the assembly falls when the suction is released.

GENERAL CARE

Suction pads need to be looked after.

- When storing, avoid the suction pads becoming crushed.
- Do not store the Adfix with the suction pads exposed to sunlight, the heat from which can damage the shape and reduce the suction.

HELP AND ADVICE

If any further help is needed, then please contact us (see below). We also very much welcome comments and suggestions to enable us to develop good products.



ADFIX SIGN HOLDING LTD
Unit 11
Lochlands Park
Dundee Road
Forfar
DD8 1XF

Tel: 07941 012817

Email: info@adfixsignholding.co.uk

Web: www.adfixsignholding.co.uk



INSTRUCTIONS ON THE USE OF ADFIX SUCTION SIGN HOLDERS




Adfix Sign Holders produced by Adfix Sign Holding Ltd are for projecting lightweight signs from a glass surface. The maximum recommended size of the signs is 0.3 sq.m area.

UNPACKING

The Sign Holders are supplied in sets of two halves carefully arranged to protect the suction pads from damage during transit.


The nylon screws are packed separately.

The two parts should be placed back to back on a hard surface and the single anchor screw is then inserted with the nut loosely tightened as shown.

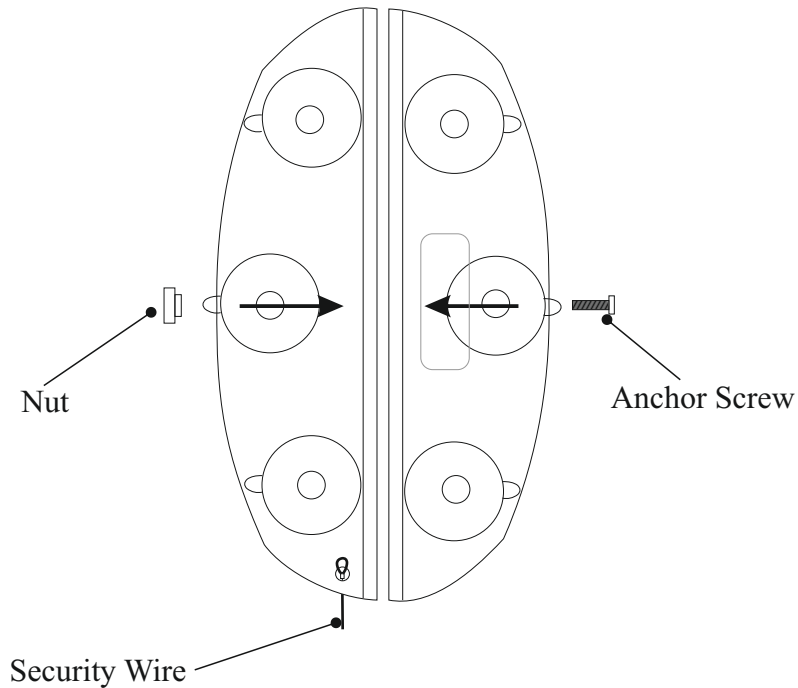

PREPARING THE SIGN

The hole positions need to be marked out, either from the Holder or to the dimensions shown.

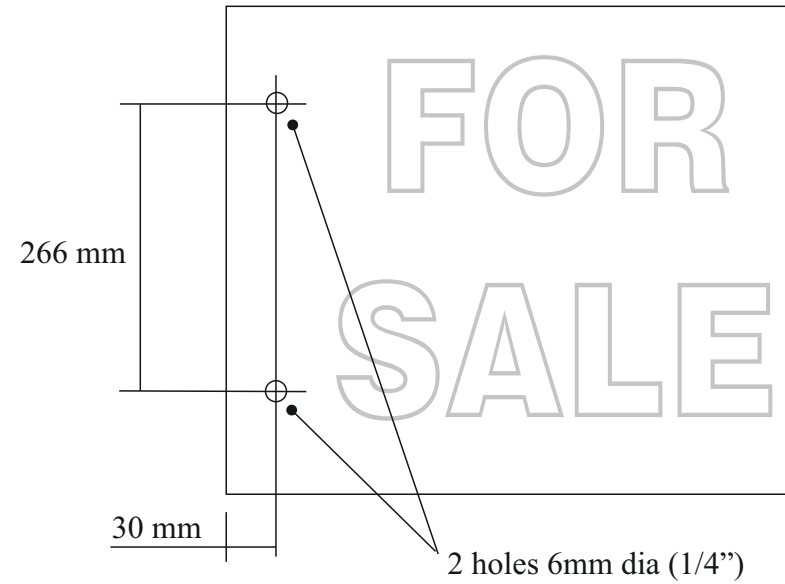

ASSEMBLING THE ADFIX

